



**Exceptional cooling meets incredible power saving**

**5 STAR RANGE**



5 STAR - ZW




Pearl White

5 STAR - ZR



Wine Red

5 STAR - S

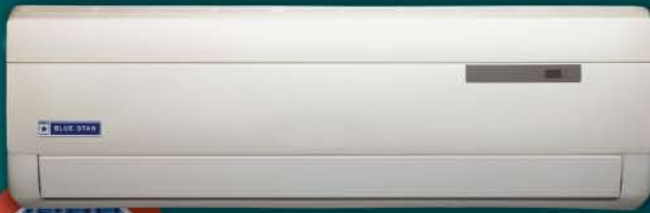

White


5 STAR - M



White



This range of stylish 5 Star ACs, combine faster cooling with superb savings. What's more, they come in four attractive colours, Champagne Gold, Wine Red, Pearl White and White for you to choose from. These ACs don't just enhance the beauty of your room but also help you save on your electricity bills.

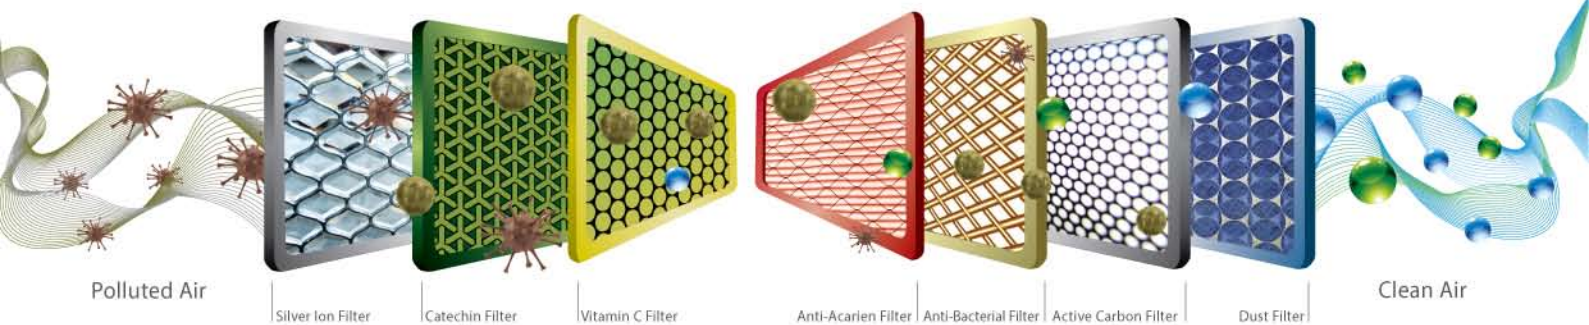

5 STAR - ZG

5 STAR - S

R410A 5 STAR - S



Champagne Gold



White

Common Features



Active Carbon Filter



Long Distance Piping Flexibility



Sleep Mode



Auto Mode



Louvred Fin Condenser\*



Powder-Coated Outer Body



Self Diagnosis



Anti-Freeze Thermostat



On/Off Timer



Dry Mode



Wide Angle Airflow



Fixed and Swing Louvres



Air Flow Direction Control



Multi-Fan Speed



Hydrophilic Blue Fins Evaporator



Turbo Operation



Dust Filter



Metal Enclosure for PCB board



Auto Restart with Memory Backup



Cleanable Panel



High Efficiency Rotary Compressor

Special Features

\* Not in 5 Star - S Copper Condenser

5 STAR - Z SERIES / 5 STAR - S / R410A 5 STAR - S



I Feel



Blow Button



Display Panel



Catechin Filter



Silver Ion Filter



Vitamin C Filter



Anti-Bacterial Filter



Elegant Remote Control



Anti-Acarien Filter

5 STAR - M



Economy Mode

5 STAR - S  
Copper Condenser



Anti-Corrosive Blue Fin Copper Condenser

R410A 5 STAR - S



Eco-friendly R410A Refrigerant



Increased air throw that reaches farther across the room



## 5 STAR - S COPPER CONDENSER / R410A 5 STAR - S / 5 STAR - M

Model No.		5HW125C	5HW185B	5HW125AF	5HW185AF	5HW24MA
Performance Parameters	Nominal Capacity (TR)	1	1.5	1	1.5	2
	Voltage / Frequency / Phase	230V / 50Hz / Single	230V / 50Hz / Single	230V / 50Hz / Single	230V / 50Hz / Single	230V / 50Hz / Single
	Cooling Capacity (Watt)	3655	5050	3470	5110	6400
	Power Input (Watt)	1040	1440	990	1450	1820
	EER (W / W)	3.51	3.51	3.51	3.52	3.52
	Star Rating - BEE Table 2.3	5 Star	5 Star	5 Star	5 Star	5 Star
	Running Current (Amps)	4.6	6.3	4.4	6.3	7.8
	Moisture Removal (Litres / hour)	1.8	1.8	1.4	1.8	3.5
	Airflow Volume (Wet CFM) (High / Medium / Low)	460 / 384 / 325	460 / 384 / 325	342 / 300 / 277	460 / 384 / 325	754 / 668 / 582
	Noise Level Indoor (High / Med / Low) in db(A)	46 / 42 / 38	46 / 42 / 38	43 / 39 / 35	46 / 42 / 38	49 / 46 / 42
Dimensions, Weight & Input Power Supply	IDU Dimension (W x H x D) mm	940 x 298 x 200	940 x 298 x 200	845 x 275 x 180	940 x 298 x 200	1250 x 325 x 230
	Input Power Supply	Indoor Unit	Indoor Unit	Indoor Unit	Indoor Unit	Outdoor Unit
	Net Weight IDU	14 Kg	14 Kg	10 Kg	14 Kg	18 Kg
	ODU Dimension (W x H x D) mm	858 x 536 x 327	968 x 689 x 367	858 x 536 x 327	968 x 689 x 367	968 x 689 x 367
	Noise Level Outdoor in db(A)	54	56	56	58	58
	Net Weight ODU	34 Kg	46 Kg	30 Kg	41 Kg	45 Kg
Compressor	Compressor Type	Rotary	Rotary	Rotary	Rotary	Rotary
	Compressor Warranty	5 Year	5 Year	5 Year	5 Year	5 Year
Refrigerant & Ambient Operations	Refrigerant	R 22	R 22	R 410a	R 410a	R 22
	Max Ambient Temp °C	46 °C	46 °C	46 °C	46 °C	46 °C
Remote	Remote	Large LCD with Backlit	Large LCD with Backlit	Large LCD with Backlit	Large LCD with Backlit	Large LCD with Backlit
	Night Glow Function on Remote Buttons	Yes	Yes	Yes	Yes	No
Tube Size & Piping Capability	Suction Tube Size Outer Diameter Inch (mm)	1/2" (12.7 mm)	5/8" (15.88 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)	5/8" (15.88 mm)
	Liquid Tube Size Outer Diameter Inch (mm)	1/4" (6.35 mm)	3/8" (9.52 mm)	1/4" (6.35 mm)	1/4" (6.35 mm)	3/8" (9.52 mm)
	Max Piping Capability Total (m)	20	20	20	20	20
	Max Piping Capability Vertical (m)	10	10	10	10	10
	Refrigerant Additional Charge Beyond 3.66m (g / m)	15	15	15	15	15

## 5 STAR - ZW ZG ZR / 5 STAR - S

Model No.		5HW122CW / 5HW122CG / 5HW122CR	5HW122DW / 5HW122DG / 5HW122DR	5HW182CW / 5HW182CG / 5HW182CR	5HW095A	5HW125A	5HW125B	5HW185A
Performance Parameters	Nominal Capacity (TR)	1	1	1.5	0.75	1	1	1.5
	Voltage / Frequency / Phase	230V / 50Hz / Single	230V / 50Hz / Single	230V / 50Hz / Single	230V / 50Hz / Single	230V / 50Hz / Single	230V / 50Hz / Single	230V / 50Hz / Single
	Cooling Capacity (Watt)	3525	3525	5260	2600	3525	3525	5260
	Power Input (Watt)	1005	1005	1500	740	1005	1005	1500
	EER (W / W)	3.51	3.51	3.51	3.51	3.51	3.51	3.51
	Star Rating - BEE Table 2.3	5 Star	5 Star	5 Star	5 Star	5 Star	5 Star	5 Star
	Running Current (Amps)	4.6	4.4	6.9	3.2	4.6	4.4	6.4
	Moisture Removal (Litres / Hour)	1.4	1.4	1.8	0.8	1.4	1.4	1.8
	Airflow Volume (Wet CFM) (High / Medium / Low)	342 / 300 / 277	342 / 300 / 277	460 / 384 / 325	289 / 254 / 230	342 / 300 / 277	342 / 300 / 277	460 / 384 / 325
	Noise Level Indoor (High / Med / Low) in db(A)	43 / 39 / 35	43 / 39 / 35	46 / 42 / 38	41 / 36 / 31	43 / 39 / 35	43 / 39 / 35	46 / 42 / 38
Dimensions, Weight & Input Power Supply	IDU Dimension (W x H x D) mm	845 x 275 x 180	845 x 275 x 180	940 x 298 x 200	790 x 265 x 170	845 x 275 x 180	845 x 275 x 180	940 x 298 x 200
	Input Power Supply	Indoor Unit	Indoor Unit	Indoor Unit	Indoor Unit	Indoor Unit	Indoor Unit	Indoor Unit
	Net Weight IDU	10 Kg	10 Kg	14 Kg	9 Kg	10 Kg	10 Kg	14 Kg
	ODU Dimension (W x H x D) mm	858 x 536 x 327	899 x 596 x 378	968 x 689 x 367	848 x 540 x 320	858 x 536 x 327	899 x 596 x 378	968 x 689 x 367
	Noise Level Outdoor in db(A)	54	54	56	56	54	54	56
	Net Weight ODU	33 Kg	37.5 Kg	41 Kg	29 Kg	33 Kg	37.5 Kg	41 Kg
Compressor	Compressor Type	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary	Rotary
	Compressor Warranty	5 Year	5 Year	5 Year	5 Year	5 Year	5 Year	5 Year
Refrigerant & Ambient Operations	Refrigerant	R 22	R 22	R 22	R 22	R 22	R 22	R 22
	Max Ambient Temp °C	46 °C	46 °C	46 °C	46 °C	46 °C	46 °C	46 °C
Remote	Remote	Large LCD with Backlit	Large LCD with Backlit	Large LCD with Backlit	Large LCD with Backlit	Large LCD with Backlit	Large LCD with Backlit	Large LCD with Backlit
	Night Glow Function on Remote Buttons	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Tube Size & Piping Capability	Suction Tube Size Outer Diameter Inch (mm)	1/2" (12.7 mm)	1/2" (12 mm)	1/2" (12.7 mm)	3/8" (9.52 mm)	1/2" (12.7 mm)	1/2" (12 mm)	1/2" (12.7 mm)
	Liquid Tube Size Outer Diameter Inch (mm)	1/4" (6.35 mm)	1/4" (6 mm)	1/4" (6.35 mm)	1/4" (6 mm)	1/4" (6.35 mm)	1/4" (6 mm)	1/4" (6.35 mm)
	Max Piping Capability Total (m)	20	20	20	12	20	20	20
	Max Piping Capability Vertical (m)	10	10	10	7	10	10	10
	Refrigerant Additional Charge Beyond 3.66m (g / m)	15	15	15	15	15	15	15